

## INDOOR BATHROOM LED MIRROR LIGHT



### **Technical data**

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	8W; 15W; 20W;
<i>Power supply:</i>	Control gear; DC device- driver
<i>Colour temperature:</i>	2700K; 4000K;
<i>LED source:</i>	SMD 2835
<i>Body:</i>	Aluminium+ PC
<i>Beam angle:</i>	120°; 133 °
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>20 000
<i>Long life:</i>	30 000h
<i>Protection against dust and moisture:</i>	IP44

## Features

- *Efficient replacement of traditional fluorescent tubes*
- *Wide distribution of even and stable light*
- *Economic- low power consumption*
- *Repeated switch on/off does not effect the fixture lifespan*
- *Instant light at maximum luminous flux*
- *Environmentally friendly - no mercury and lead*
- *No ultraviolet and infrared rays*
- *Voltage supply fluctuations do not affect the normal operation of the floodlights*


## Area of application

- *Bathrooms*
- *Places with high level of moisture*

## Variants and Dimensions

Watt	Whole fixture lumens	Colour temp.	Beam angle	Size (mm)			Catalogue number
<b>(W)</b>	<b>(lm)</b>	<b>(K)</b>		<b>Length</b>	<b>Height</b>	<b>Width</b>	
<b>8</b>	504	4000	120°	400	121	42	<b>95IP4411</b>
<b>8</b>	504	2700	120°	400	121	42	<b>95IP4414</b>
<b>8</b>	504	4000	120°	400	121	42	<b>95IP4411/2</b>
<b>15</b>	1200	4000	133°	600	65	53	<b>95IP4412</b>
<b>20</b>	1600	4000	133°	900	65	53	<b>95IP4413</b>

## Energy efficiency

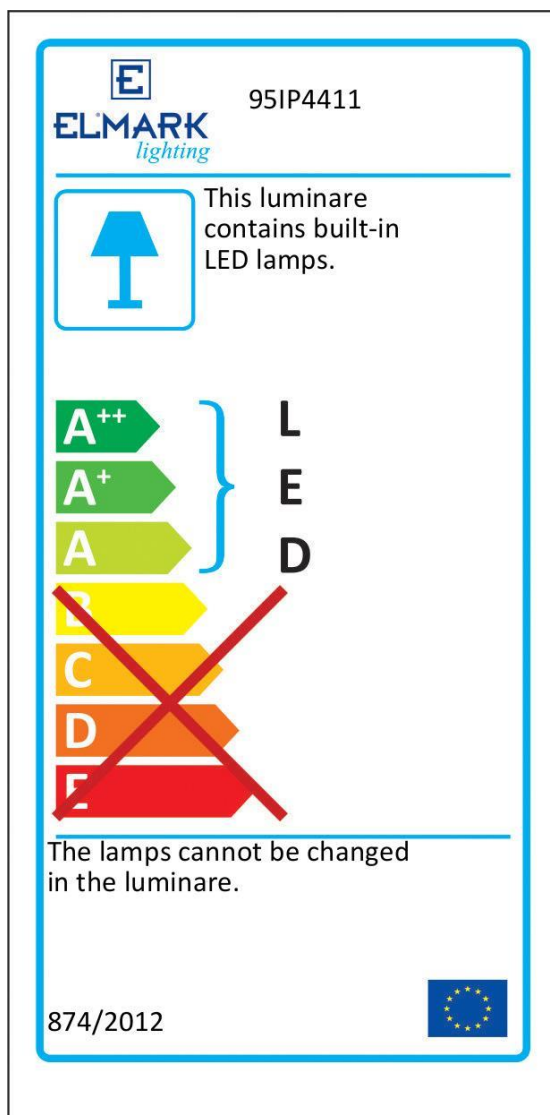

## Standards

- EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

