


LAMP PHOTOMETRIC REPORT

MODEL: 96GRF1/91524		
POWER: 9W	VOLTAGE: 230V	WORKING VOLTAGE: 230V
MANUFACTURER: Elmark Industries JSC		

TOTAL FLUX: 631.75 lm

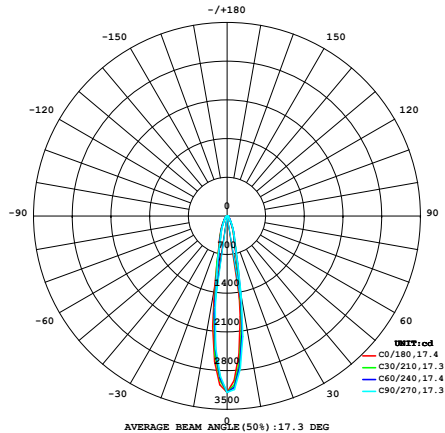

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	1214	1374	1472	1396	1316	1151	1073	1147	0- 10	203.0	203.0	32.1
20	351.7	370.9	381.0	378.1	376.5	350.6	330.7	336.9	10- 20	175.4	378.4	59.9
30	148.4	159.5	169.2	164.3	166.5	146.0	137.1	140.2	20- 30	110.3	488.7	77.4
40	69.11	71.27	70.05	70.30	73.20	65.57	60.49	62.76	30- 40	64.46	553.2	87.6
50	35.78	37.13	39.66	40.57	39.27	34.20	34.99	36.11	40- 50	39.35	592.5	93.8
60	17.07	18.06	17.12	18.65	17.66	15.40	17.46	15.31	50- 60	23.20	615.7	97.5
70	7.395	7.681	6.959	7.775	7.199	6.336	7.310	6.437	60- 70	11.67	627.4	99.3
80	1.201	1.307	1.325	1.270	1.246	1.025	1.077	1.094	70- 80	3.948	631.3	99.9
90	0.0545	0.0586	0.0518	0.0584	0.0654	0.0627	0.0491	0.0557	80- 90	0.4242	631.7	100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature: 25.3°C

Operators:

Test Date: 01 September 2022

γ Range: 0 - 90DEG

γ Interval: 2.5DEG

Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456

Humidity: 65.0%

Test Distance: 6.265m [K=1.0000]

Remarks:


```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```