

EL[®]MARK

The Brand of Electricity

LED GLOBE LAMPS E14



Technical data:

- Rated voltage: 230V; 50-60Hz
- Power: 6W; 8W
- Colour temperature: 2700K; 4000K; 6400K
- LED type: SMD2835;
- Lamp holder: E14
- Beam angle: 180°; 240°
- Colour rendering index: Ra≥80
- Number of switching cycles: >20 000
- Average life: 30 000h
- Power factor: $\lambda > 0.80$
- Starting time: < 0.50s
- Warm-up time (60 %): Instant
- Lamp mercury content: 0.0mg
- Protection degree: IP20

Features:

- Reduced operational cost thanks to lower energy consumption.
- Lower maintenance cost thanks to longer lifetime
- Mercury free.
- Maximum resistance to switching loads.
- Correct operation even at low temperature.
- Long lifetime.
- Instant-on light.

TECHNICAL SPECIFICATION

LAMPS AND COMPONENTS


ELMARK[®]

The Brand of Electricity

Area of application:

- General illumination
- Domestic applications
- Chandeliers
- Outdoor applications only in suitable luminaires

Variants and Dimensions:

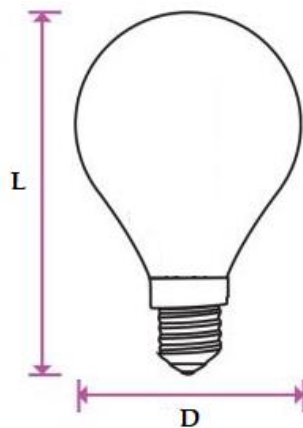

Watt (W)	Lamp holder	LED lamp lumens (lm)	Colour temp. (K)	Beam angle	Size (mm)		Catalogue number
					Length	Diameter	
6	E14	540	4000	240°	80	45	99LED746
6	E14	540	2700	240°	80	45	99LED747
6	E14	540	6400	240°	80	45	99LED800
8	E14	800	4000	180°	80	45	99LED912
8	E14	800	2700	180°	80	45	99LED913
8	E14	800	6400	180°	80	45	99LED925

TECHNICAL SPECIFICATION


LAMPS AND COMPONENTS

ELMARK[®]

The Brand of Electricity

Barcodes:

99LED746	3800131194589
99LED747	3800131194596
99LED800	3800131205230
99LED912	3800131205872
99LED913	3800131205889
99LED925	3800131208996

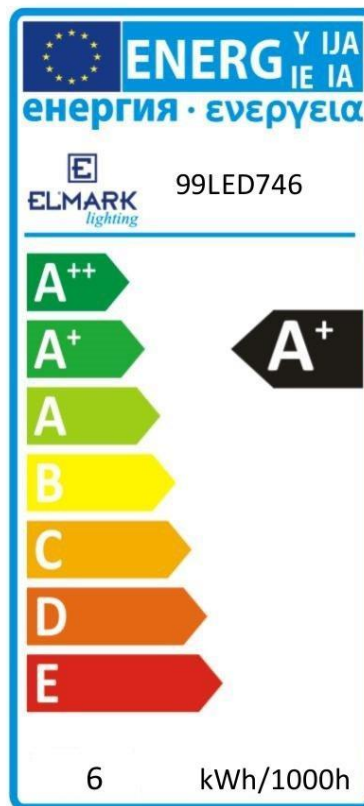

EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 62560 • EN 13032-4 • EN 50581:2012



www.elmarkholding.eu